




- TDM – 16 E1/T1
- SIP RTP ( 480 VoIP ) – 10/100 BASE-T Ethernet
- – 10/100 BASE-T Ethernet, RS-232
- IP – SIP, RTP, RTCP, TCP, UDP
- /PSTN - SS7/ -7/ 7, DSS1, R2D, 2 , 1VF
- – G.711, G.723, G.726, G.729
- DTMF – RFC2833, SIP INFO, RFC 2976
- Fax – fax over G.711, T.38 fax relay
- – 1000 SIP- – SIP-trunks
- EUROPACK 19" 1U
- 2,5
- – 220 48 /60B
- – 20
- – 0° +60°
- – 80% t 25°

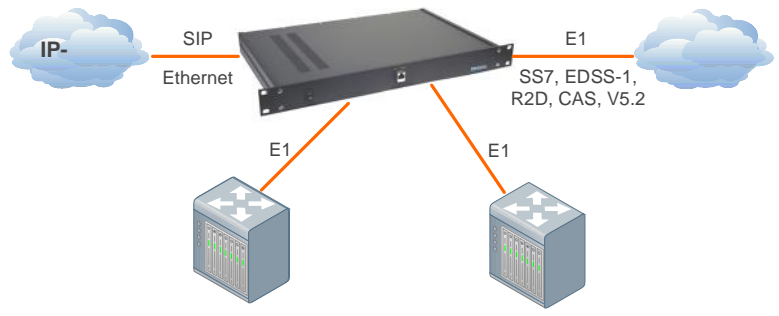

- TDM VoIP ;
- TDM Switch – 1;
- (SS7/ -7/ 7, DSS1, R2D, 2 , 1VF);
- E1.

-30 VoIP TDM/PSTN

T /PSTN