

SIP/E1 Gateway Access Control

VOIP



- TDM – 8 E1
- SIP RTP (240 VoIP) – 10/100 BASE-T Ethernet
- – 10/100 BASE-T Ethernet, RS-232, SNMP v2


- IP – SIP, RTP, RTCP, TCP, UDP
- /PSTN – 7, ISDN PRI (DSS1), R2D, 2, R1.5, V5.2, V5.1

- – G.711, G.723, G.726, G.729
- DTMF – RFC2833, SIP INFO, RFC 2976
- Fax – fax over G.711, T.38 fax relay
- – 1000
- SIP-
- – SIP-trunks

- EUROPACK 19" 1U
- 2,5

- – 220 48 /60B
- – 20W

- – 0° +60°
- – 80% t 25°

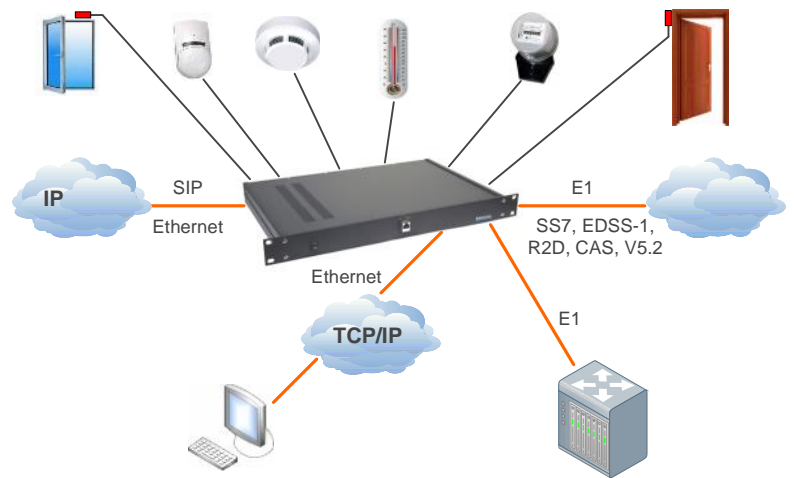

- (10..12V, 100mA 10..15V 750mA);
- ;
- 0..3V ();
- 0..90V ();
-);
- ~220V;
- 12V.

SIP/E1 Gateway + TDM/PSTN

(VoIP)

VoIP

(Ethernet)

220V.