


		D-201E/D-401E	
		Asterisk IP-PBX	
		/	
E1.	-		
PCI 32/33 MHz.			
120			
	E1.		
PCI			
	E1.		
D-201E/D-401E			
	DAHDI/Zaptel.		
	D-201E/D-401E		
		5,	3,3
PCI,	PCI-X		
CPU			
PCI	-	PCI.	
ECM-128-OCT/ECM-064-OCT.			

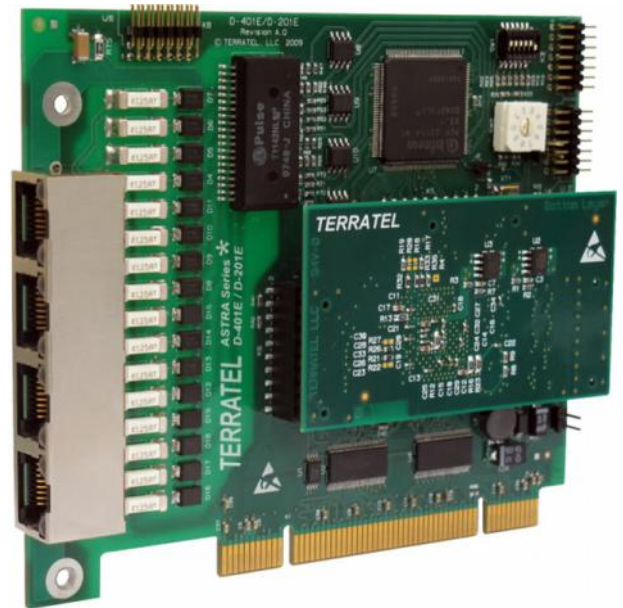

- : HDB3, AMI, B8ZS
- : CRC-4, CRC-4,
- ESF, SF, D4T1/E1

- SyncPPP
- Frame Relay
- Cisco HDLC
- Multi-link PPP
- Feature Group D
- E&M Wink
- a-Law,  $\mu$ -Law
- Linear Modes Supported

- 800
- 128
- PCI 2.2 32- /33

- Linux kernel 2.6.x
- Legacy PBX/IVR
- (VoIP)
- Complex IVR Trees
- "Meet-Me" Bridge Conferencing
- VoIP Gateways (supports SIP, H.323 and IAX)
- Calling Card Platforms
- Voice/Data Router
- PRI Switch Compatibility – Network or CPE
- Asterisk IP-PBX