


VOIP

TDM IP



- TDM – 16 E1/T1
- SIP RTP (480 VoIP) – 10/100 BASE-T Ethernet
- – 10/100 BASE-T Ethernet, RS-232
- IP – SIP, RTP, RTCP, TCP, UDP
- /PSTN – SS7/ -7, ISDN PRI (DSS1), V5.2, 2 , R2D
- – G.711, G.723, G.726, G.729
- DTMF – RFC2833, SIP INFO, RFC 2976
- Fax – fax over G.711, T.38 fax relay
- – 1000 SIP-
- – SIP-trunks
- EUROPACK 19" 1U
- 2,5
- – 220 48 /60B
- – 20
- : 0° +60°
- : 80% +25°
- TDM/PSTN ;
- IP-
- TDM, TDM-IP, TDM-TDM.
- TDM VoIP ;
- TDM Switch – 1;
- - -7, ISDN PRI (DSS1), V5.2, V5.1, R2D, R2 MFC, R2 DTMF, 2 , 1
- E1.

- TDM – 16 E1/T1
- SIP RTP (480 VoIP) – 10/100 BASE-T Ethernet
- – 10/100 BASE-T Ethernet, RS-232
- IP – SIP, RTP, RTCP, TCP, UDP
- /PSTN – SS7/ -7, ISDN PRI (DSS1), V5.2, 2 , R2D
- – G.711, G.723, G.726, G.729
- DTMF – RFC2833, SIP INFO, RFC 2976
- Fax – fax over G.711, T.38 fax relay
- – 1000 SIP-
- – SIP-trunks
- EUROPACK 19" 1U
- 2,5
- – 220 48 /60B
- – 20

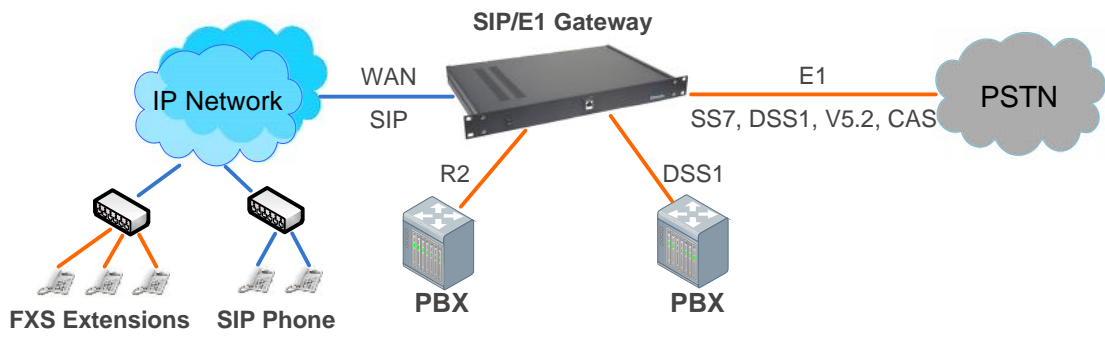

SIP/E1 Gateway (VoIP)	VoIP TDM/PSTN
T /PSTN	