

-7, ISDN PRI (DSS1), V5.2, V5.1, R2D, R2 MFC, R2 DTMF, 2, 1




- TDM – 8 E1/T1
- SIP RTP (240 VoIP) – 10/100 BASE-T Ethernet
- – 10/100 BASE-T Ethernet, RS-232

- IP – SIP, RTP, RTCP, TCP, UDP
- /PSTN – -7, ISDN PRI (DSS1), V5.2, V5.1, R2D, R2 MFC, R2 DTMF, 2, 1

- – G.711, G.723, G.726, G.729
- DTMF – RFC2833, SIP INFO, RFC 2976
- Fax – fax over G.711, T.38 fax relay
- – 1000
- SIP- – SIP-trunks

- EUROPACK 19" 1U
- 2,5

- – 220 48 /60B
- – 20

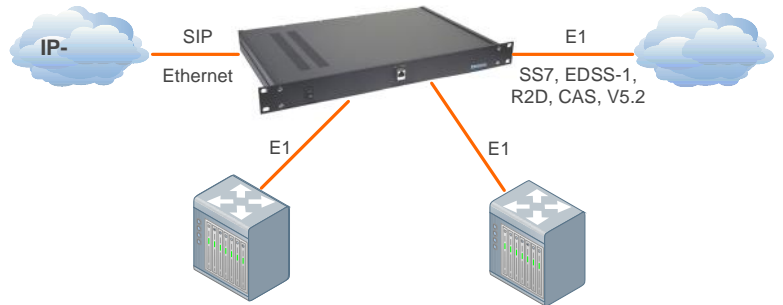

- TDM/PSTN ;
- IP- – 0° +60°
- – 80% t 25°
- TDM, TDM-IP, TDM-TDM.

VoIP TDM/PSTN

T /PSTN