


SIP/E1 Gateway Access Control

VOIP

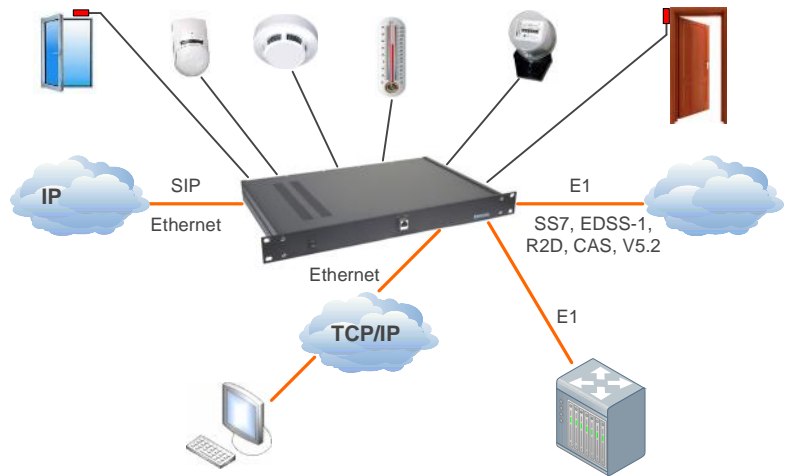

- TDM – 8 E1
- SIP RTP (240 VoIP) – 10/100
- BASE-T Ethernet – 10/100 BASE-T
- Ethernet, RS-232, SNMP v2
- IP – SIP, RTP, RTCP, TCP, UDP
- /PSTN – 7, ISDN PRI (DSS1), R2D, 2, R1.5, V5.2, V5.1
- G.711, G.723, G.726, G.729
- DTMF – RFC2833, SIP INFO, RFC 2976
- Fax – fax over G.711, T.38 fax relay
- 1000
- SIP- – SIP-trunks
- EUROPACK 19" 1U
- 2,5
- 220 48 /60B
- 20W
- 0° +60°
- 80% t 25°

- (10..12V, 100mA 10..15V 750mA)
- 0..3V ()
- 0..90V ()
- ~220V;
- 12V.

SIP/E1 Gateway + TDM/PSTN

(VoIP)

VoIP

Ethernet

220V.