

SIP/E1 Gateway

VOIP

TDM IP

- TDM – 16 E1
- SIP RTP (480 VoIP) – 10/100 BASE-T Ethernet
- – Dual redundant 10/100 BASE-T Ethernet, RS-232

- IP – SIP, RTP, RTCP, TCP, UDP
- PSTN – 7, ISDN PRI (DSS1), V5.2, R2 MFC

- – G.711, G.723, G.726, G.729


- DTMF – RFC2833, SIP INFO, RFC 2976
- Fax – fax over G.711, T.38 fax relay
- – 5000

- SIP- – SIP-trunks
- Ethernet SyncE ()

- SNMP
- Syslog Telnet (for CLI)



- Single/Dual-redundant 220 VAC or 48/60 VDC Input
- 24
- EUROPACK 19" 1U, 2,5
- : 0° +60°
- : 80% +25°
- TDM VoIP
- TDM Switch – 1
- - -7, (MTP2, MTP3, ISUP), ISDN PRI (DSS1), V5.2, R2 MFC
- E1

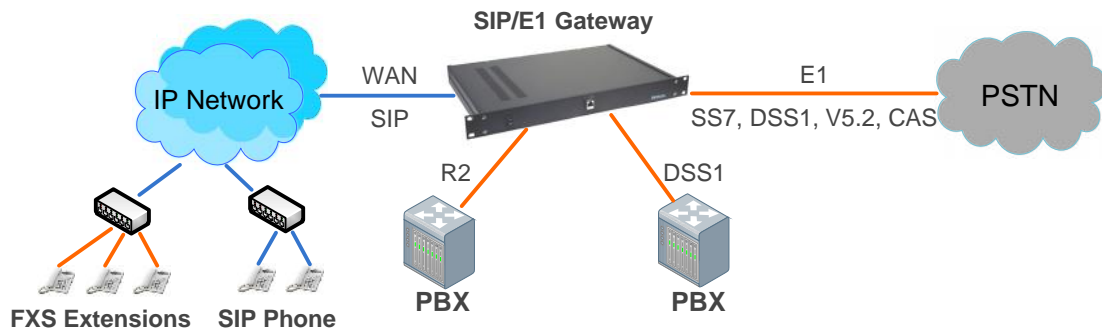

SIP/E1 Gateway (VoIP)

)

VoIP TDM/PSTN

T /PSTN